

Magnetic or True?

The Battle For The Direction Datum

When is a direction not a direction? Practically always, it appears, on a planet with a constantly fluctuating molten magnetic core. That means that there are consequences to using, as we currently do, Magnetic directions for aviation. Paul Hickley of the RIN's General Aviation Navigation Group (GANG) puts the case for a change to True directions.

Here's what might seem a simple question: Why are runway centrelines, airways centrelines and ATC instructions always given in Magnetic direction rather than True? The answer, you might think, is too obvious to need stating: because aircraft compasses give magnetic direction, so it's simpler for the pilot. Well, yes, historically that was the case. But there are counter-arguments. When you measure a track off your topographical chart, it is True direction. Also, more and more of us are using GPS, even at GA level, and any GPS-defined tracks are in True. And, of course, the greatest user of our airspace is commercial air traffic, and any airliner built in the last 40 years or so uses a 'compass' based on True. Agreed, they do also carry a magnetic compass, but it is a small standby one, similar to those found in light aircraft and only used in an emergency.

If history were different, and we had invented gyroscopes hundreds of years ago, but had only invented the magnetic compass recently and were now offered it, the aviation world would reject it.

True direction can be established from measuring the spin of the Earth, offers operating accuracy of the order of one tenth of a degree and remains constant with time. By contrast, the instantaneous accuracy of a magnetic compass (that is, a snapshot at any random instant) is probably of the order of two degrees. When integrated over a period

of tens of minutes or longer, this reduces to about half a degree. More importantly, magnetic declination (or variation, as it is commonly called by aviators) changes with location and time, necessitating constant updating of published procedures.

Earth Magnetism

The usual simple model used to visualise the Earth's magnetic field is to imagine a straight bar magnet running through the Earth, but this is a gross simplification. The majority of the Earth's magnetism is caused because the outer core of the Earth is a mass of molten metal containing significant amount of ferrous ores. The combination of the rotation of the Earth and the convection currents within this liquid creates the geodynamo which makes up the main component of the field. The remainder comes from local magnetic anomalies caused by deposits of solid mineral, mainly magnetite, nearer the surface of the Earth.

The overall effect is more like a bent bar magnet. The North and South magnetic poles are not co-located with the True poles, as defined by the extremities of the Earth's spin axis, nor are they antipodal. For instance, in 2010 the North magnetic pole was at approximately 85N 120W, while the South magnetic pole was around 64S 135E – so far away from the True pole that it is not even on the continent of Antarctica.

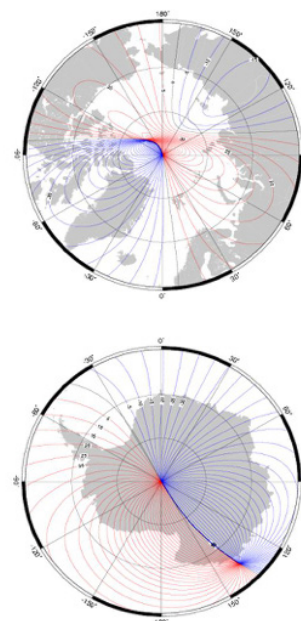


Figure 1 Polar Isogonals in 2010.
Credit: British Geological Survey (NERC)

More importantly, these magnetic poles are constantly moving. At Oxford Airport, for instance, the variation in 1942 was 11°W. In 2011 it was 2°W. It had changed 9° in approximately 70 years, giving an overall rate over that period of one degree every 7.66 years. In other parts of the world, the rates of change are different and how fast these rates

of change are speeding up or slowing down is also different.

Nobody knows what causes variation to change and attempts to model the changing pattern break down after a certain point because of the complexity of the equations. All that can be done is to observe what has happened in the past and extrapolate into the near future. As with weather modelling, the further ahead we attempt to predict, the less accurate the model becomes.

There are also parts of the world where it is impossible to use a magnetic compass at all. Near the poles, the lines of flux of the Earth's magnetic field take up a very steep inclination to the Earth's surface. The scientific term for this is inclination, but it is normally called the angle of dip by aviators. Close to the poles, the horizontal component drops to less than 6 microteslas, which is the generally accepted figure for the threshold below which a compass can no longer be used. This diagram shows the northern zone 6 microteslas zone and it is evident that it is quite a large one. The one in the southern hemisphere is even larger.

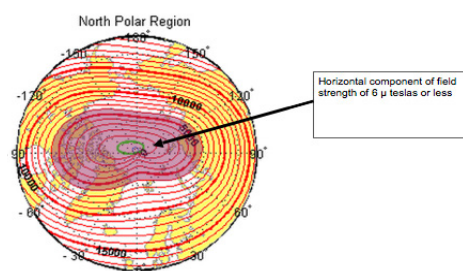


Figure 2 The 6 microtesla contour – North Pole

There are also unpredictable changes to variation. Solar flares can be radiated towards the Earth, particularly at times of peak sunspot activity. The time that they take to pass through the Earth's magnetosphere is short – but their effects are noticeable. During the last 11-year sunspot cycle peak, variation anomalies of up to 7° lasting several hours were observed.

Current Practice - and Exceptions.

Nevertheless, despite these limitations, magnetic direction is used as the datum for instructions, procedures and control in aviation, including airways tracks, approach procedure tracks and runway centrelines. When the variation alters by more than one degree, it becomes necessary to republish any printed runway and approach documentation. However, runway directions are defined by rounding the magnetic centreline, upwards or downwards, to the nearest ten degrees, then expressing them as a 2-digit figure. 195, for instance, rounded upwards, becomes 200, or Runway 20, while 194 is rounded downwards to 190, or Runway 19. This necessitates re-painting the large white numerals on the

main runways, and closing the airfield while the work is in progress. Consider the situation at Tampa, Florida, when the runways were re-designated in January 2011. The North/South parallel runway's centrelines are orientated 006.0°T and changed from 36 to 01. According to the FAA, variation at Tampa in 2005 was 4.3°W, with an annual change of about 0.1°W. They should have changed as soon as the magnetic variation was 3.5°W or more, which occurred in 1998. So, even then, the runways should have been designated 01 and 19, but up until 2011, they were 36 and 18.

So why did the airport take 13 years to get round to conforming to what is established statutory practice? One can only surmise, but one of the reasons may be that it had to close for a week in order to re-paint the runways. This would have represented a significant loss of income for such a large airport and they may have put off biting the bullet until they could really leave it no longer.

The other main application in which Magnetic is used as a datum is in those navigation aids where the bearing information is put in at the ground station, that is, VDF, VOR and the military TACAN.

Having decided on this convention, by usage and custom, we then depart from it when it becomes unworkable. At latitudes above 60° or so, tracks and routes published on charts are given in True because of the weakness of the horizontal component of the magnetic field and because it changes so rapidly with both location and time. It is simply assumed that any aircraft operating at high and polar latitudes will be equipped with a navigation system that gives it the ability to operate in True or Grid. Some high-latitude VORs are orientated to True North. Near Resolute Bay, Canada, the variation changes from 10°W to 90°W within about 200 nautical miles. A straight line track on this chart would change magnetic track by 80° in that distance. Everyone using this VOR has to work in True.

Changing to True

Let's now examine how to tidy up this situation. The obvious way is to convert all directions for aviation instructions, procedures and control to True, since we have to use it near polar regions anyway. Let's examine what effect it would have on:

- Airliners
- Aircraft with a gyro-magnetic compass – that is, a good gyro slaved to a magnetic flux valve
- Directional Gyro Indicators (DGI), manually reset to a Direct Reading Compass
- Direct Reading Compass only

Airliners

Any airliner introduced into service less than 40 years ago uses an inertial navigation gyro-based system for navigation. Two, or sometimes three inertial reference systems determine true heading from measuring the direction of the Earth's spin. In the modern Flight Management System, all the navigation computations of spherical trigonometry to calculate desired tracks and all the computations of position data in latitude and longitude are carried out in True, so, for purely navigational purposes, there is no requirement for magnetic direction. Therefore, no magnetic sensor, or flux valve, incorporated into the system.

However, for compatibility with Air Traffic Control procedures, the aircraft have to be capable of operating in magnetic. Thus, the Inertial Reference System contains a database with values of variation against latitude and longitude. Note that this is the reverse of the traditional situation, in which Magnetic heading was sensed and variation was used to convert it to True for navigation. Here, True is sensed, and variation is used in reverse to convert it to a computed Magnetic heading for Air Traffic procedures.

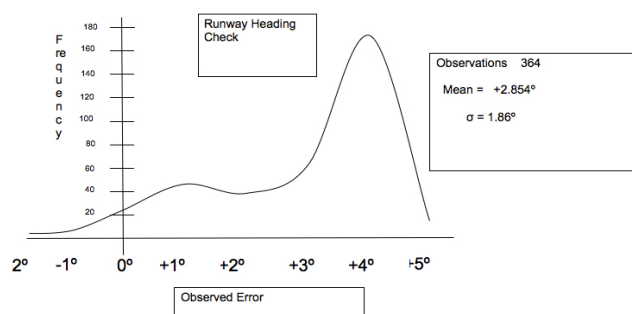


Figure 3 Airline Pilot's Runway Alignment Trial Data. Credit: Paul Hickley

The problem is that variation changes with time. The database is calculated for the half decade in which the IRS was built, ie, built in 1981, set for 1985, built in 1992, set for 1995, and so on. Unless the database is updated, the information goes out of date. Unfortunately, updating is expensive and there is no strong incentive for the airline to carry it out.

It is difficult to establish how often these databases do actually get updated and, clearly, those airlines which allow the data to get out of date will be reluctant to give details of their procedures. However, one airline pilot was so concerned that he took a series of readings over a period of 20 months between 2006 and 2008 in order to confirm what was otherwise merely anecdotal – that the heading shown by the EFIS in his fleet was nearly always a larger figure than the published runway centreline. He was operating in Western Europe and there, with westerly variation reducing with time, the indicated magnetic heading would be too great if the correction database was out of date.

His data is at Figure 3. 364 is quite a reasonable number of observations. The mean is $+2.854^\circ$, but the mode is more significant, at 4° , especially as he was reading to only the nearest degree. There must be some explanation of why this sample is skewed so well to the positive side of zero and by far the most probable one is that the variation databases were out of date.

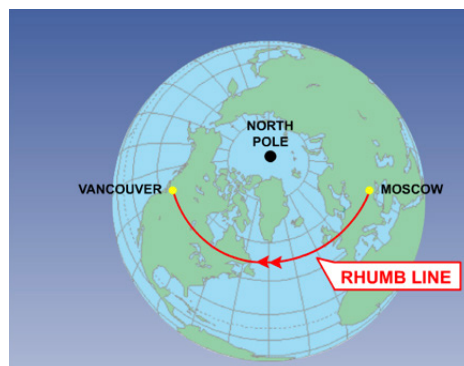


Figure 4 Rhumb Line Track.
Credit: OAA Media

Does this matter? Does it make a difference to safety? For ILS and VOR approaches, probably not, because the aircraft is following a deviation signal against the ILS centreline or the VOR radial, which are paths over the ground and do not change. However, in the ADF, it is the aircraft heading which positions the needle, or its modern electronic equivalent. For an NDB let down, it is a well-established procedure that the descent should not be commenced unless within 5° of the centreline, because the Minimum Descent Altitude is based on terrain within that domain. If the datum heading is 4° out because of the false artificial value of variation, before we start considering any other source of error, it seems possible that safety margins are being eroded.

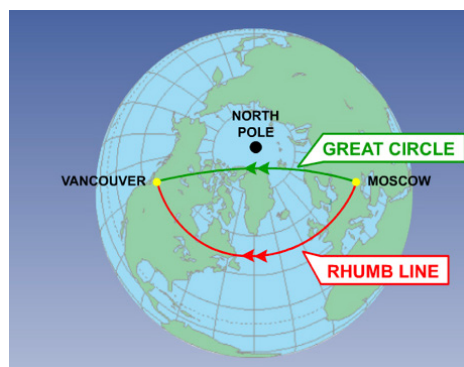


Figure 5 Great Circle Track.
Credit: OAA Media

Additionally, the variation correction system in IRS and FMS is not available at high latitudes. The manufacturers accept that, near the poles, the value of variation is so high and the rate of change is so great, that it would be unsafe to make it available. Therefore at latitudes north of 73°N and south of 60°S , only True headings and tracks are displayed. The magnetic database is inhibited at these latitudes and everyone flies in True.

These regions are becoming more and more important to routine passenger aviation. Thirty years ago, if you needed to fly from Moscow to Vancouver, you would have followed a path at temperate latitudes – something like Figure 4.

These days, your route would be more like Figure 5. Today's aircraft can fly 12 or 13 hours at a time, giving ranges of around 5000 miles in a single leg. They are exceptionally reliable and the chances of an unplanned landing in inhospitable climates are very low. But, more importantly, gyro-based navigation systems allow us to navigate across the pole, saving thousands of miles on some journeys.

Aircraft With A Gyro-Magnetic Compass

Let's now turn to those aircraft which use a traditional gyro-magnetic compass in other words, one with a flux valve, such as might be found in an air taxi aircraft.

In fact, this problem of operating gyro-magnetic compasses in True has been dealt with before. During the Fifties and Sixties, compasses were magnetic but automatic dead reckoning systems using Doppler needed their input to be in True, to be compatible with a latitude and longitude graticule. Most compasses for large aircraft of that period had a facility for manual entry of variation to give a true read-out to the navigation equipment and, in many cases, to the actual compass dial, so that the pilot could fly True headings off the compass.

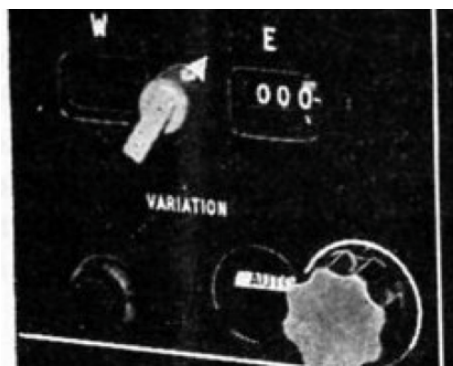


Figure 6 Manual Variation Setting Controller.
Credit: MOD

This facility tended to die out in gyro-magnetic compasses produced after about 1970 because the Doppler Ground Position Indicators had become digital by then and it was simpler to adjust the variation in the display computer itself, not the compass. However, if we switched to True, the demand would revive, and it would be an easy matter for manufacturers to reinstate a well-established fifty-year old technology into modern gyro-magnetic compasses.

Directional Gyro Indicators (DGI)

We now turn to those aircraft using a combination of Direct Reading Magnetic Compass and a Direction Gyro Indicator. These present the smallest problem of all. The

DGI has no direct magnetic input and is simply set by the pilot to whatever datum is required. Normally, this is magnetic direction. All that would be required would be that the pilot would have to apply the local variation every time they reset the DGI, which is normally every fifteen minutes or so. The light aircraft community has nothing at all to fear from such a change.

Direct Reading Compass Only

For aircraft which have nothing but a magnetic compass, which is mainly the microlight community, the only real option would be to mentally apply variation. Generally, these aircraft tend not to fly much more than, say, 100 miles from their home bases and it is a simple matter to remember just one value of variation and apply it every time.

VORs

The variation at a VOR is set at the ground station. It can be altered easily by changing the reference signal and, in fact, it has to be adjusted every time there is a variation change at present. The facility is already there to change it from Magnetic to True North. Once set, unlike the present situation, it would not need to be moved again.

In fact, within the UK, any change to the VORs will require less work than it would have done previously. NATS propose to reduce the number of VORs within the UK from 46 to 19 over the next 7 years. Clearly, they believe that all commercial traffic is now fitted with some form of area navigation equipment and that a large number of private pilots have GPS.

GPS

GPS establishes position in latitude and longitude, which is based on True north. Because of its extreme accuracy, by integrating successive fixes over a short time interval, it calculates True track, which can either be displayed in numerical form or as a track marker on a moving-map display.



Figure 7 Typical Moving-Map GPS Display.
Credit: Airbox

This particular model cost about £160 when launched, which is about the cost of one hour's light aircraft flying. These days, you don't even need to buy the device – you simply download the app to your iPad. It is actually cheaper than a simple Direct Reading Compass. Given that True track is now available at this sort of price, why would anybody want magnetic heading,

except possibly as a standby in the event of a power failure?

The Case for Converting to True

The case for converting to True as the datum for aviation instructions, procedures and control is clear, and the only problems would be those of practically implementing it. The biggest single problem in trying to implement this change worldwide would be inertia – the large number of countries involved and the difficulty of finding the will to all change at once.

The biggest single problem in trying to implement this change worldwide would be inertia - the large number of countries involved and the difficulty of finding the will to all change at once.

Some of these countries do not have a sophisticated aviation environment which could deal with this easily, and in others, such as the United States, the sheer extent of the change would be formidable and might meet opposition from a conservative general aviation lobby. Probably the only way that it could happen would be if a single country were to file a difference with ICAO and change unilaterally. Once they had proved that it worked without problems, we might then expect others to follow progressively.

This is not as unprecedented as it sounds. Some countries use feet for altitude, others use metres. Some use hectopascals, others

use inches of mercury, and so on. There is no difference in principle if some were to use Magnetic and others to use True.

One airline pilot was so concerned that he took a series of readings over a period of 20 months between 2006 and 2008 in order to confirm what was otherwise merely anecdotal - that the heading showed by the EFIS in his fleet was nearly always a larger figure than the published runway centreline.

In fact, one country has already taken a lead. The rate of variation change, both with time and position, are so great in parts of Canada that, at the 12th ICAO Conference, held in Montreal in November 2012, NAV CANADA, the agency that owns and operates Canada's civil air navigation system submitted a working paper which reported as follows:

4.3.5 Navigation with reference to True North only. NAV CANADA continues to investigate only the use of navigation referencing True north for aircraft operations. A significant effort is expended to update current aeronautical information with changing magnetic variation (MAGVAR). Modern avionics carry out navigation calculations with reference to True north, and then convert the information for pilot displays to Magnetic (by applying a magnetic

variation based on a magnetic model), or True heading or true Track, depending on aircraft capability). Safety activity in recent months include the emergency re-painting of runways as a result of lapsed MAGVAR data and the cancellation of all CAT 1 through III approach because of a changing MAGVAR, and out of date MAGVAR reference tables on board the aircraft (as old as 2005) in some states. NAV CANADA believes all operations referenced to true north would enhance the overall safety floor and save considerable effort in maintaining MAGVAR tables.

The paper concluded with the following recommendation (some other recommendations, not relevant to this topic, are omitted from the quote below):

6.2 The Conference is invited to agree to the following recommendation:..... That the Conference request ICAO to:.....

.....consider employing navigation with reference to True North as the standard reference.

RIN takes the view that the case for converting to True as the datum for aviation instructions, procedures and control is clear, and the only problems would be those of practically implementing it. While it would be a huge and costly undertaking, it would also be a one-off operation which, once completed, would be final, unlike the present situation which is also costly, but is constantly with us. You may have your own views on the subject, in which case we would like to hear from you. In the first instance, contact the Editor at editor@rin.org.uk.

Navigation News Classified

Navigation News is your magazine - it exists to serve you. Why not take advantage of its wide readership to list your company, your service or your own personal expertise in its Classifieds section. RIN Members get their first Classified ad absolutely free, so whether you've got a boat to sell or a plane

to buy, or whether you simply want to let others know you're available for hire, contact the Editor at editor@rin.org.uk, and submit your Classified for the next issue.

Advertising Rates

All rates are quoted in £ sterling and exclude VAT.

Display	SERIES RATE		
	1	3	6
Inside Cover	£1275	£1145	£995
Inside Back Cover	£1275	£1145	£995
Back Cover	£1750	£1550	£1275
Advertorial 2 pages	£2995	£2695	£2495
Double Page Spread	£1995	£1750	£1550
Full Page	£1150	£1045	£970
Half Page Landscape	£645	£580	£520
Third Page	£495	£445	£395
Quarter Page	£295	£265	£250
Eighth Page	£195	£175	£160

Run of magazine rates upon request.

The Directory

Single Column x 60mm	£140	£126	£90
Single Column x 30mm	£75	£68	£55
Double Column x 60mm	£225	£195	£160
Double Column x 30mm	£140	£126	£90
Quarter Page Portrait	£250	£195	£150
Quarter Page Landscape	£250	£195	£150

Inserts

A5/A4 Folded insert into magazine up to 100gsm £125

Other sizes or weights on request.

